

PORCELANOSA Grupo

LED profiles

Solutions to illuminate and highlight PORCELANOSA tiles.

butech
PORCELANOSA Grupo

LED profiles

The butech LED profiles are an ideal complement to PORCELANOSA Lifestyle environments.

Enhancing volumes and indentations in surfaces or creating new atmospheres is made easy, giving character and prominence to specific elements or areas.

LED lighting may also represent a simple solution to common situations in projects: identifying stairs, steps, mezzanines, etc.



pro-light 7.5 mm


A very subtle LED profile.
Especially recommended for creating environments in which a
relatively intimate beam of light is required.



pro-light 11 mm


Adapts the indirect light emitted by the luminous strips, resulting in an aesthetically pleasing environment with low power consumption.



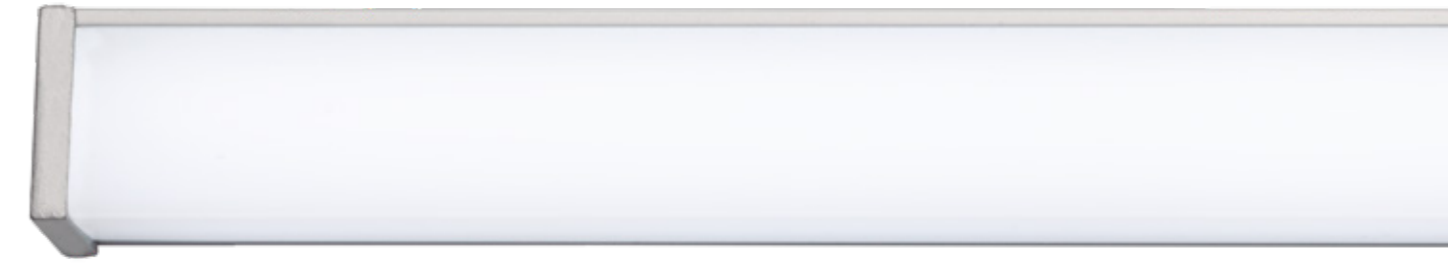

pro-corner light

Excellent solution to accentuate or combine with the rest of ambient lighting. Light becomes another means of expression.

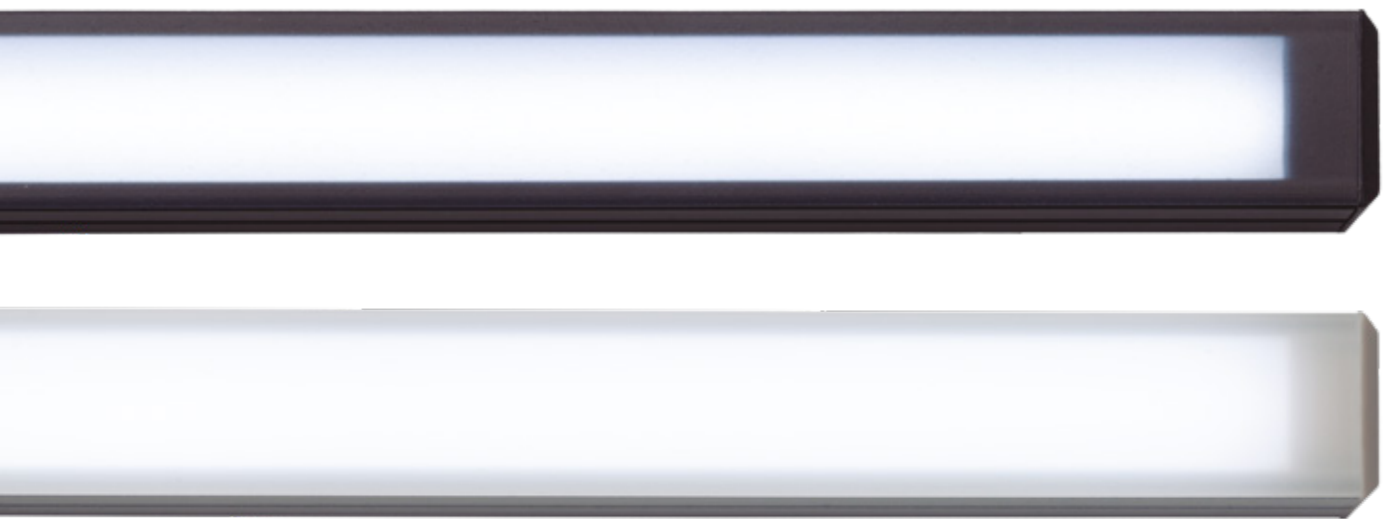

pro-telo light

Solution for minimally invasive interventions, going unnoticed when it is switched off. Modern and suggestive effects when the LED light is turned on.






pro-mate 45 TOP light

Increasingly in demand, these profiles offer light where it is really needed.

Perfect to illuminate furniture and drawers inside and out, giving a decorative and practical touch to any furniture.

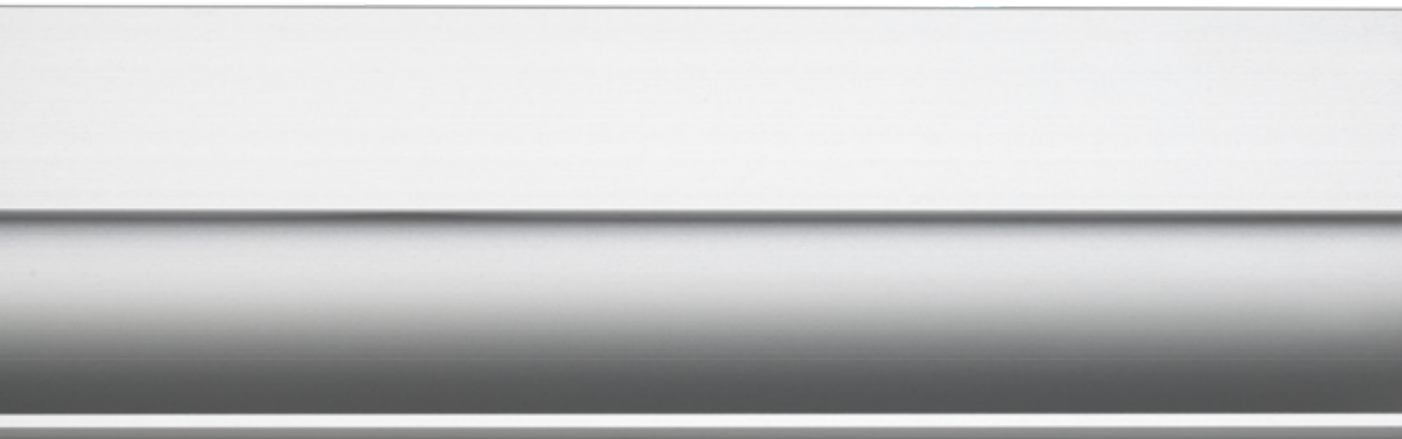

pro-skirting LED

Useful to illuminate the perimeter of a room and corridors.
Ideal when looking for a non-dazzling light to use at night time.







COB LED Strip

Linear lighting system for pro-light collection profiles. COB LED luminaires are packages of multiple LEDs which are joined together into a single lighting module. In practice, only one point of light is seen, but with a higher light output. Therefore, with the same power as an SMD, more Lumens / watt are achieved.



pro-light 7.5 mm

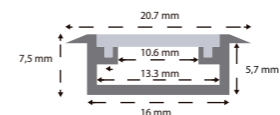

pro-light 7.5 mm

Anodized aluminium

SAP		h (mm)
100243703	Black	7.5
100243677	Silver	7.5

Includes profile, diffuser, clamps and caps. Lighting system not included.

Profile length: 2500 mm


Minimum packing: 1 profile





pro-light 11 mm

pro-light 11 mm

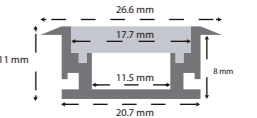

Anodized aluminium

SAP		h (mm)
100202237	Silver	11


Diffuser and lighting system not included. Covers are supplied separately.

Profile length: 2500 mm

Minimum packing: 1 profile

pro-corner light

pro-corner light



Anodized aluminium

SAP	h (mm)
100243678	16

Includes profile, diffuser, clamps and caps. Lighting system not included.



Profile length: 2500 mm

Minimum packing: 1 profile





pro-telo light



pro-telo light



Anodized aluminium

SAP		h (mm)
100281601	black	12
100281600	Silver	12

Includes profile, diffuser, electrical wiring system and mounting system.

Profile length: 3000 mm

Minimum packing: 1 profile



pro-telo light slim

Anodized aluminium



SAP		h (mm)
100328075	black	5,5
100328096	Silver	5,5

Includes profile, diffuser, electrical wiring system and mounting system.

Profile length: 2500 mm

Minimum packing: 1 profile

pro-mate 45 TOP light



pro-mate 45 TOP light

Anodized aluminium

SAP	h (mm)
100243649	22.5

Includes profile, diffuser, clamps and caps. Lighting system not included.

Profile length: 2500 mm

Minimum packing: 1 profile





pro-skirting LED

pro-skirting LED



Anodized aluminium

SAP		h (mm)
100200414	black	13
100213201	tapa black	13
100200418	white	13
100213220	tapa white	13
100200403	silver	13
100213154	tapa silver	13
100232655	difusor	-

Diffuser and lighting system not included.
Covers are supplied separately.

Profile length: 2500 mm

Minimum packing: 1 profile

COB LED Strip

COB LED Strip IP20

IP20			
SAP		mm	
100298585	3000°K	2x10x2500 mm	Power 15 W/m Voltage 24 V Chips / m 480 PCB 10 mm
100298526	4000°K	2x10x2500 mm	Lumens 3.000°K 1400 Lm/m*
100298597	6500°K	2x10x2500 mm	Lumens 4.000°K 1500 Lm/m*
			Lumens 6.500°K 1530 Lm/m*
			Light emission 180°

IP20: Destinations of use without the presence of water. Interior flooring and walls.

COB LED Strip IP67

IP67			
SAP		mm	
100298620	3000°K	4,5x10x2500 mm	Power 15 W/m Voltage 24 V Chips / m 480 PCB 10 mm
100298587	4000°K	4,5x10x2500 mm	Lumens 3.000°K 1205 Lm/m*
100298621	6500°K	4,5x10x2500 mm	Lumens 4.000°K 1216 Lm/m*
			Lumens 6.500°K 1210 Lm/m*
			Light emission 180°

IP67: Destinations of use with the presence of water. Interior flooring and walls and exterior facades.

LED transformer

LED transformer			
SAP		mm	
100200310		190x52x39 mm	Power 100 W Voltage 24 V Amperage 4,2 A Maximum length led strip 5 m

*The light output (Lumens) of COB LED strips may vary slightly from one strip to another.





BY APPOINTMENT TO
H.R.H. THE PRINCE OF WALES
MANUFACTURER AND DISTRIBUTOR
OF CERAMIC TILES AND BUILDING PRODUCTS.
PORCELANOSA GROUP LIMITED

PORCELANOSA Grupo

butech building technology, s.a.u.

Ctra. Vila-real - Puebla de Arenoso (CV-20), Km. 2.5 · Apartado de Correos 297 · 12540 Vila-real, Castellón - Spain.
Teléfono (+34) 964 53 62 00 · Fax: (+34) 964 53 00 34 · E-mail: butech@butech.es · www.butech.net