

Yove

Enclousure



SP

PORCELANOSA



Yove 9



Yove 9C+5



Yove 9/9




Yove 9+

Bath



Yove 9B

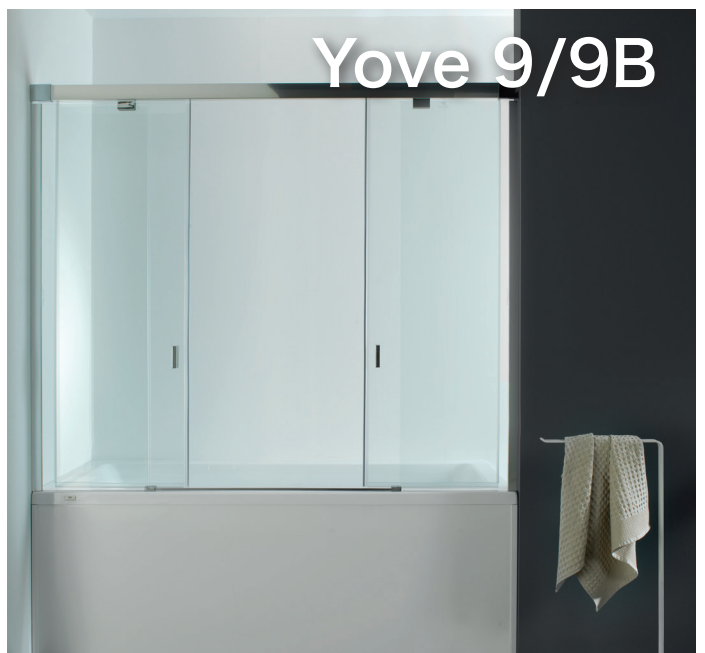

Yove 9/9B

Yove



Shower

Yove 1
Short tie rod



Yove 1
Long tie rod



Yove 4



Yove 6



Characteristics

100% contemporary style

Straight lines and geometric simplicity. The YOVE screen is thus conceived, in line with design and architecture trends prevailing nowadays.



Unlimited functional versatility

Get the most out of your space thanks to the versatility of the YOVE screen. The diversity of formats, openings, and types of installations, are a guarantee for success in any project.



Maximum simplicity, minimal concern

Created to resist the passage of time without deteriorating. The reduction of components to the essential screen elements lets us provide them with the highest quality and durability.



6mm tempered glass

As with other SP enclosures, the glass used for the YOVE collection complies with the EN-12150 standard on safety glass.



System-Glass

Exclusive SP system by which water runs quickly throughout the glass surface, extending its clean and bright appearance. It reduces lime, soap foam, and bacteria deposits.



Easy Clean

SP is committed to making the cleaning of our products easier. The concealed fastening systems, the removable rail, or the release-clip bearings, are distinguishing features of the YOVE screen.



Sliding door

The YOVE screen design makes it easy for the sliding door to move very close to the fixed glass. This saves space while at the same time it gives the screen an aesthetic value.



High-performance bearings

Our bearings last much longer. Maximum precision internal tolerances, and an ideal selection of the materials used, ensure that our bearings will run silently and effortlessly for a long time.



Micro-regulation of doors

The YOVE screen has a fine door bracket adjustment through a cam tack system built into the bearings. By using this system, we guarantee an optimum installation while preserving the look of the whole.



Perfect water tightness

All the SP screens comply with regulations on water tightness and water retention. The YOVE screen exceeds these regulations thanks to a careful comprehensive design of the whole, which makes it the best choice for the most demanding shower areas.















Premium height 1950 mm

SP screens stand out above others. Their slim and slender look, thanks to a maximized height, is also a plus in comfort much appreciated by taller people.


Technical data

Formats

SHOWER								BATH			
2 WALLS		YOVE 5		YOVE 6	3 WALLS			2 WALLS		3 WALLS	
YOVE 1	YOVE 4	YOVE 9C	YOVE 5	YOVE 6	YOVE 9	YOVE 9/9	YOVE 9+	YOVE 9B C	YOVE 5B	YOVE 9B	YOVE 9/9B
											
80	70	100	70	80	100	150	140	140	70	140	150
90	75	110	75	90	110	160	150	150	75	150	160
100	80	120	80	100	120	170	160	160	80	160	170
110	90	130	90		130	180	170	170	90	170	180
120	100	140			140		180	180		180	190
130	110	150			150			190		190	
140	120	160			160						
150	140	170			170						
		180			180						

Finishes

6 mm Tempered glass




SystemGlass Easy clean treatment



Serigraphy




Profiles






Fittings



Top Guide



Tensors



Manufacturing leadlines

Standard

15 days

Special formats and screen-printed patterns

21 days



6MM TEMPERED GLASS



SYSTEM-GLASS



EASY CLEAN



SLIDING DOOR



HIGH-PERFORMANCE BEARINGS



MICRO-REGULATION OF DOORS



PERFECT WATER TIGHTNESS



PREMIUM HEIGHT 1950 MM



KRION
PORCELANOSA Grupo

Ctra. Villarreal-Puebla de Arenoso (CV20) Km 1 · 12540 VILA-REAL (CASTELLÓN) SPAIN

PO/BOX. 372 - Tel: (+34) 964 50 64 64 Fax. (+34) 964 50 64 81

krion@krion.com / www.krion.com